



CISTER

Research Centre in
Real-Time & Embedded
Computing Systems

Poster

Bringing Context-awareness to wireless sensor networks

Shashank Gaur

Raghu R.

Eduardo Tovar

CISTER-TR-180407

2018/04/10

Bringing Context-awareness to wireless sensor networks

Shashank Gaur, Raghu R., Eduardo Tovar

*CISTER Research Centre

Polytechnic Institute of Porto (ISEP-IPP)

Rua Dr. António Bernardino de Almeida, 431

4200-072 Porto

Portugal

Tel.: +351.22.8340509, Fax: +351.22.8321159

E-mail: sgaur@isep.ipp.pt, raghu@isep.ipp.pt, emt@isep.ipp.pt

<http://www.cister.isep.ipp.pt>

Abstract


Bringing Context-awareness to Wireless Sensor Networks

Programming Approach

- Programming abstraction has been a major focus of research in WSN
- With IoT, heterogeneous devices with different capabilities brings in new issues.
- Essential features for systems to support these changes and user to write applications are as following:
 - Abstraction, Mobility and Modularity


T-Res

- T-Res attempts to provide support for IoT devices
- Tasks are divided into 4 parts: Input Source(is), Output Device(od), Processing Function(pf) and Last Output(lo)
- It uses CoAP and IPv6 addresses to assign tasks to resources
 - Put, Post, Get, Observe
- User inputs via CoAP agent for Firefox, Copper.

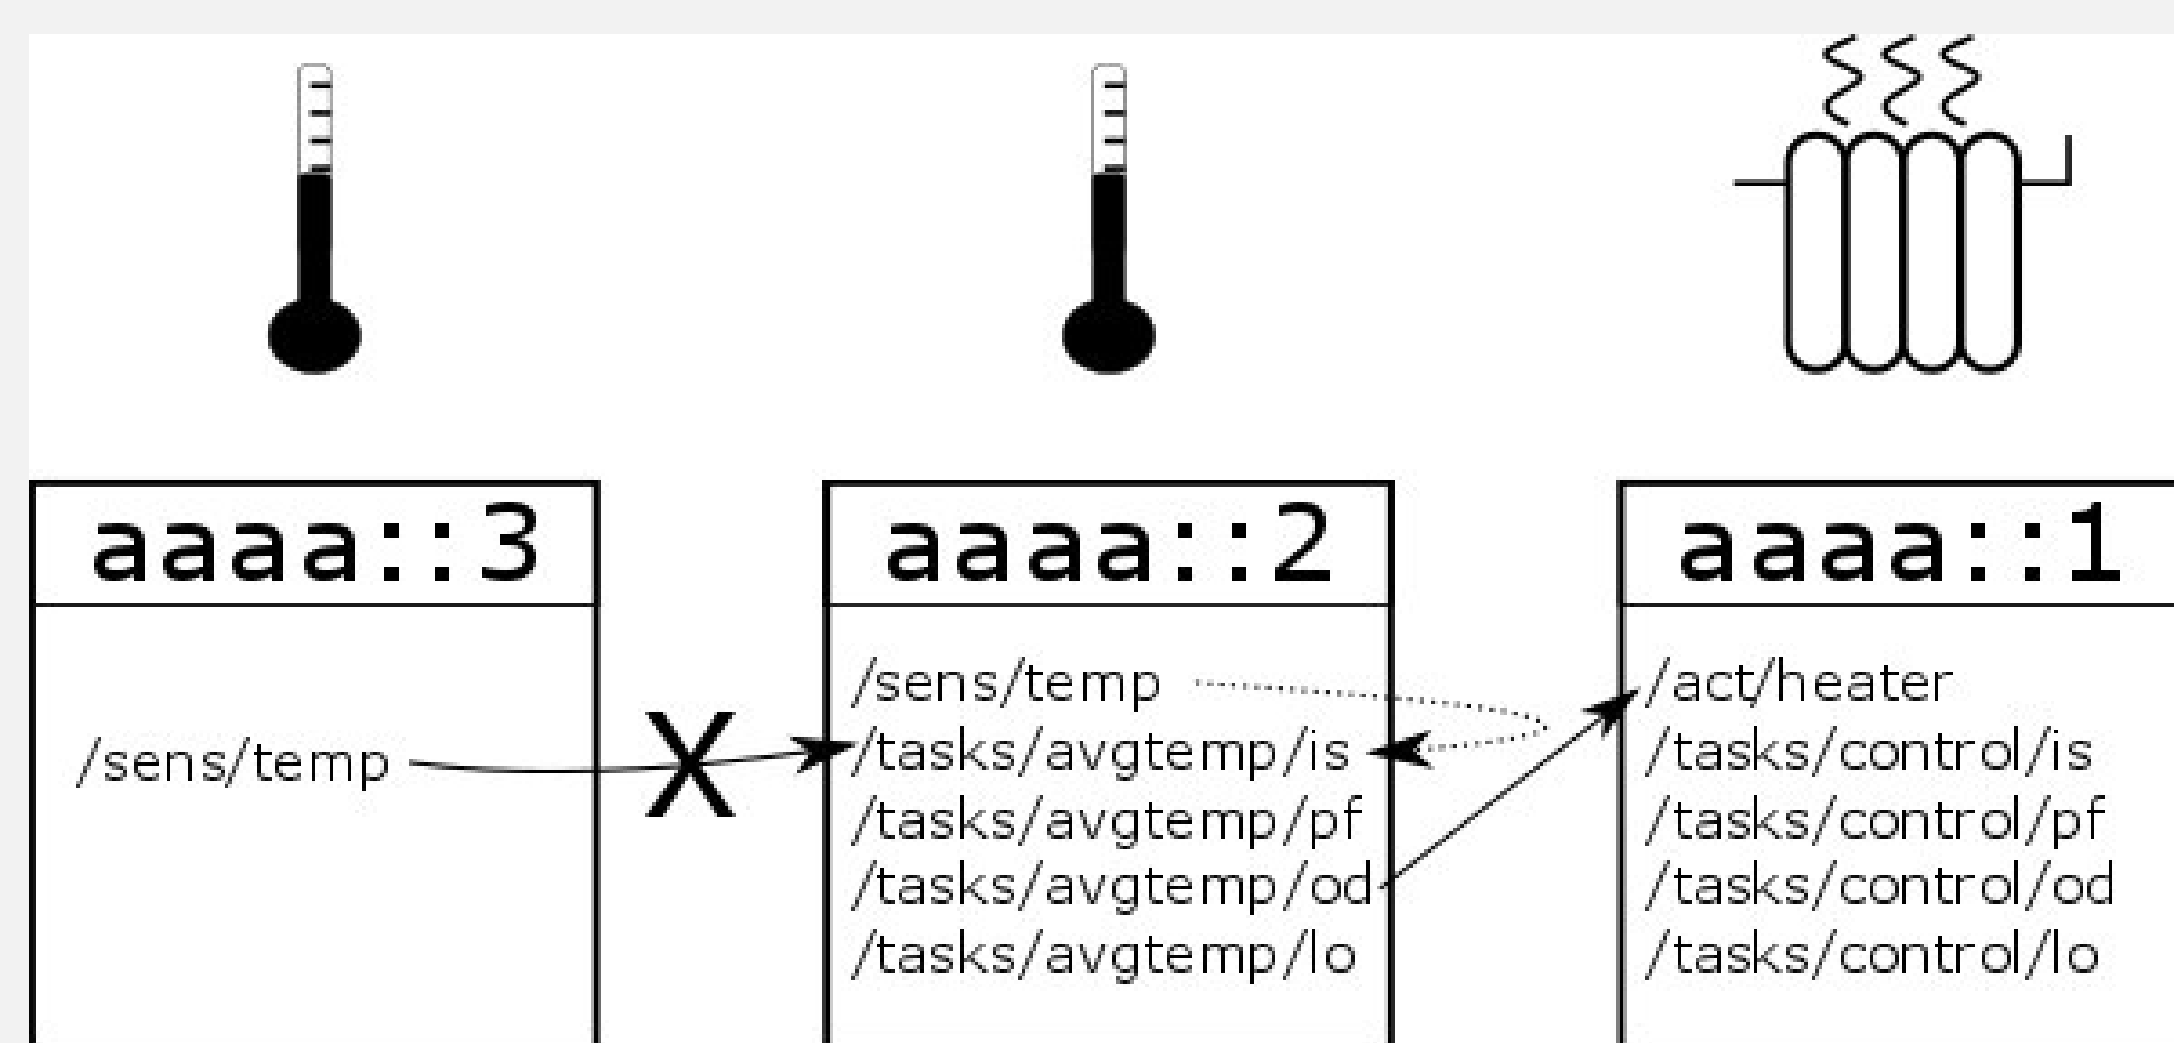

mT-Res: Mobility in T-Res

- mT-Res extends T-Res with help of automated CoAP operations
- Simple applications such as
 - node failure
 - Change of host node
 - New application for each node

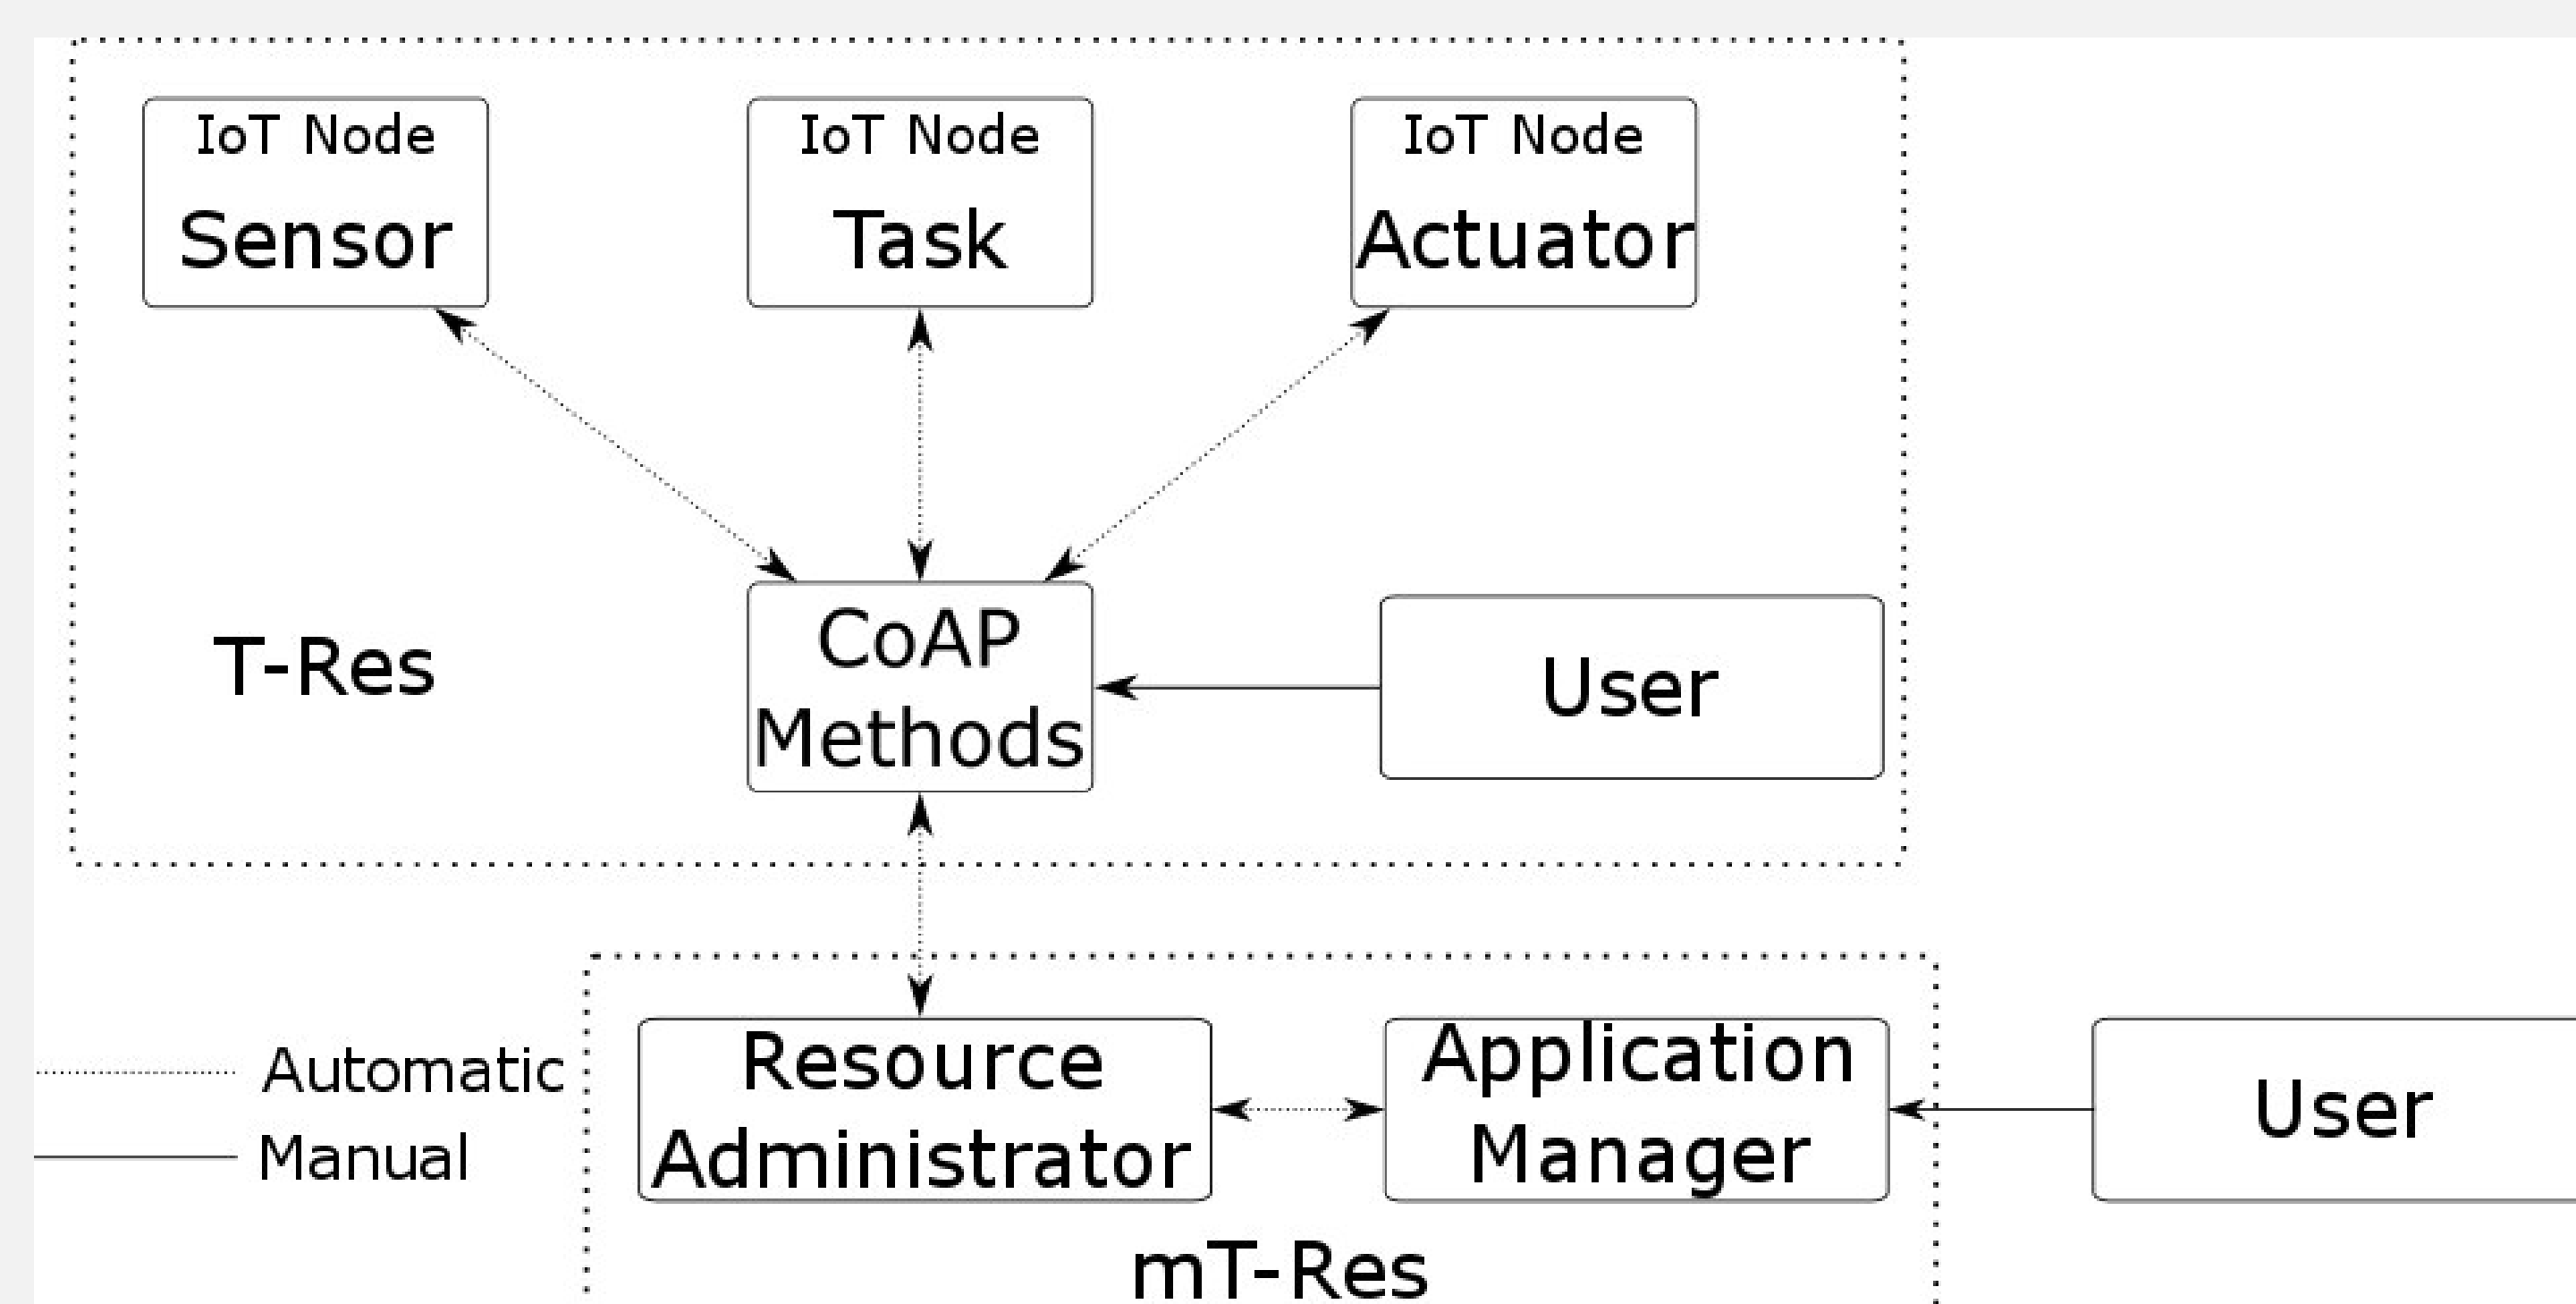


Application Manager

- Web framework in Django
- For user to submit tasks in 4 parts: Input Type, Output Type, Host (Fixed or Any), and Code.
- Wraps T-Res code with small functions for conditional flags

Resource Administrator

- Python Scripts enabling CoAP functions
- Always active and updating resources
 - Provides a table to Application Manager
- Works along the Application manager
 - After tasks are submitted, allocates resources
- For any change detected in Resources
 - Restarts the resource allocation

Example

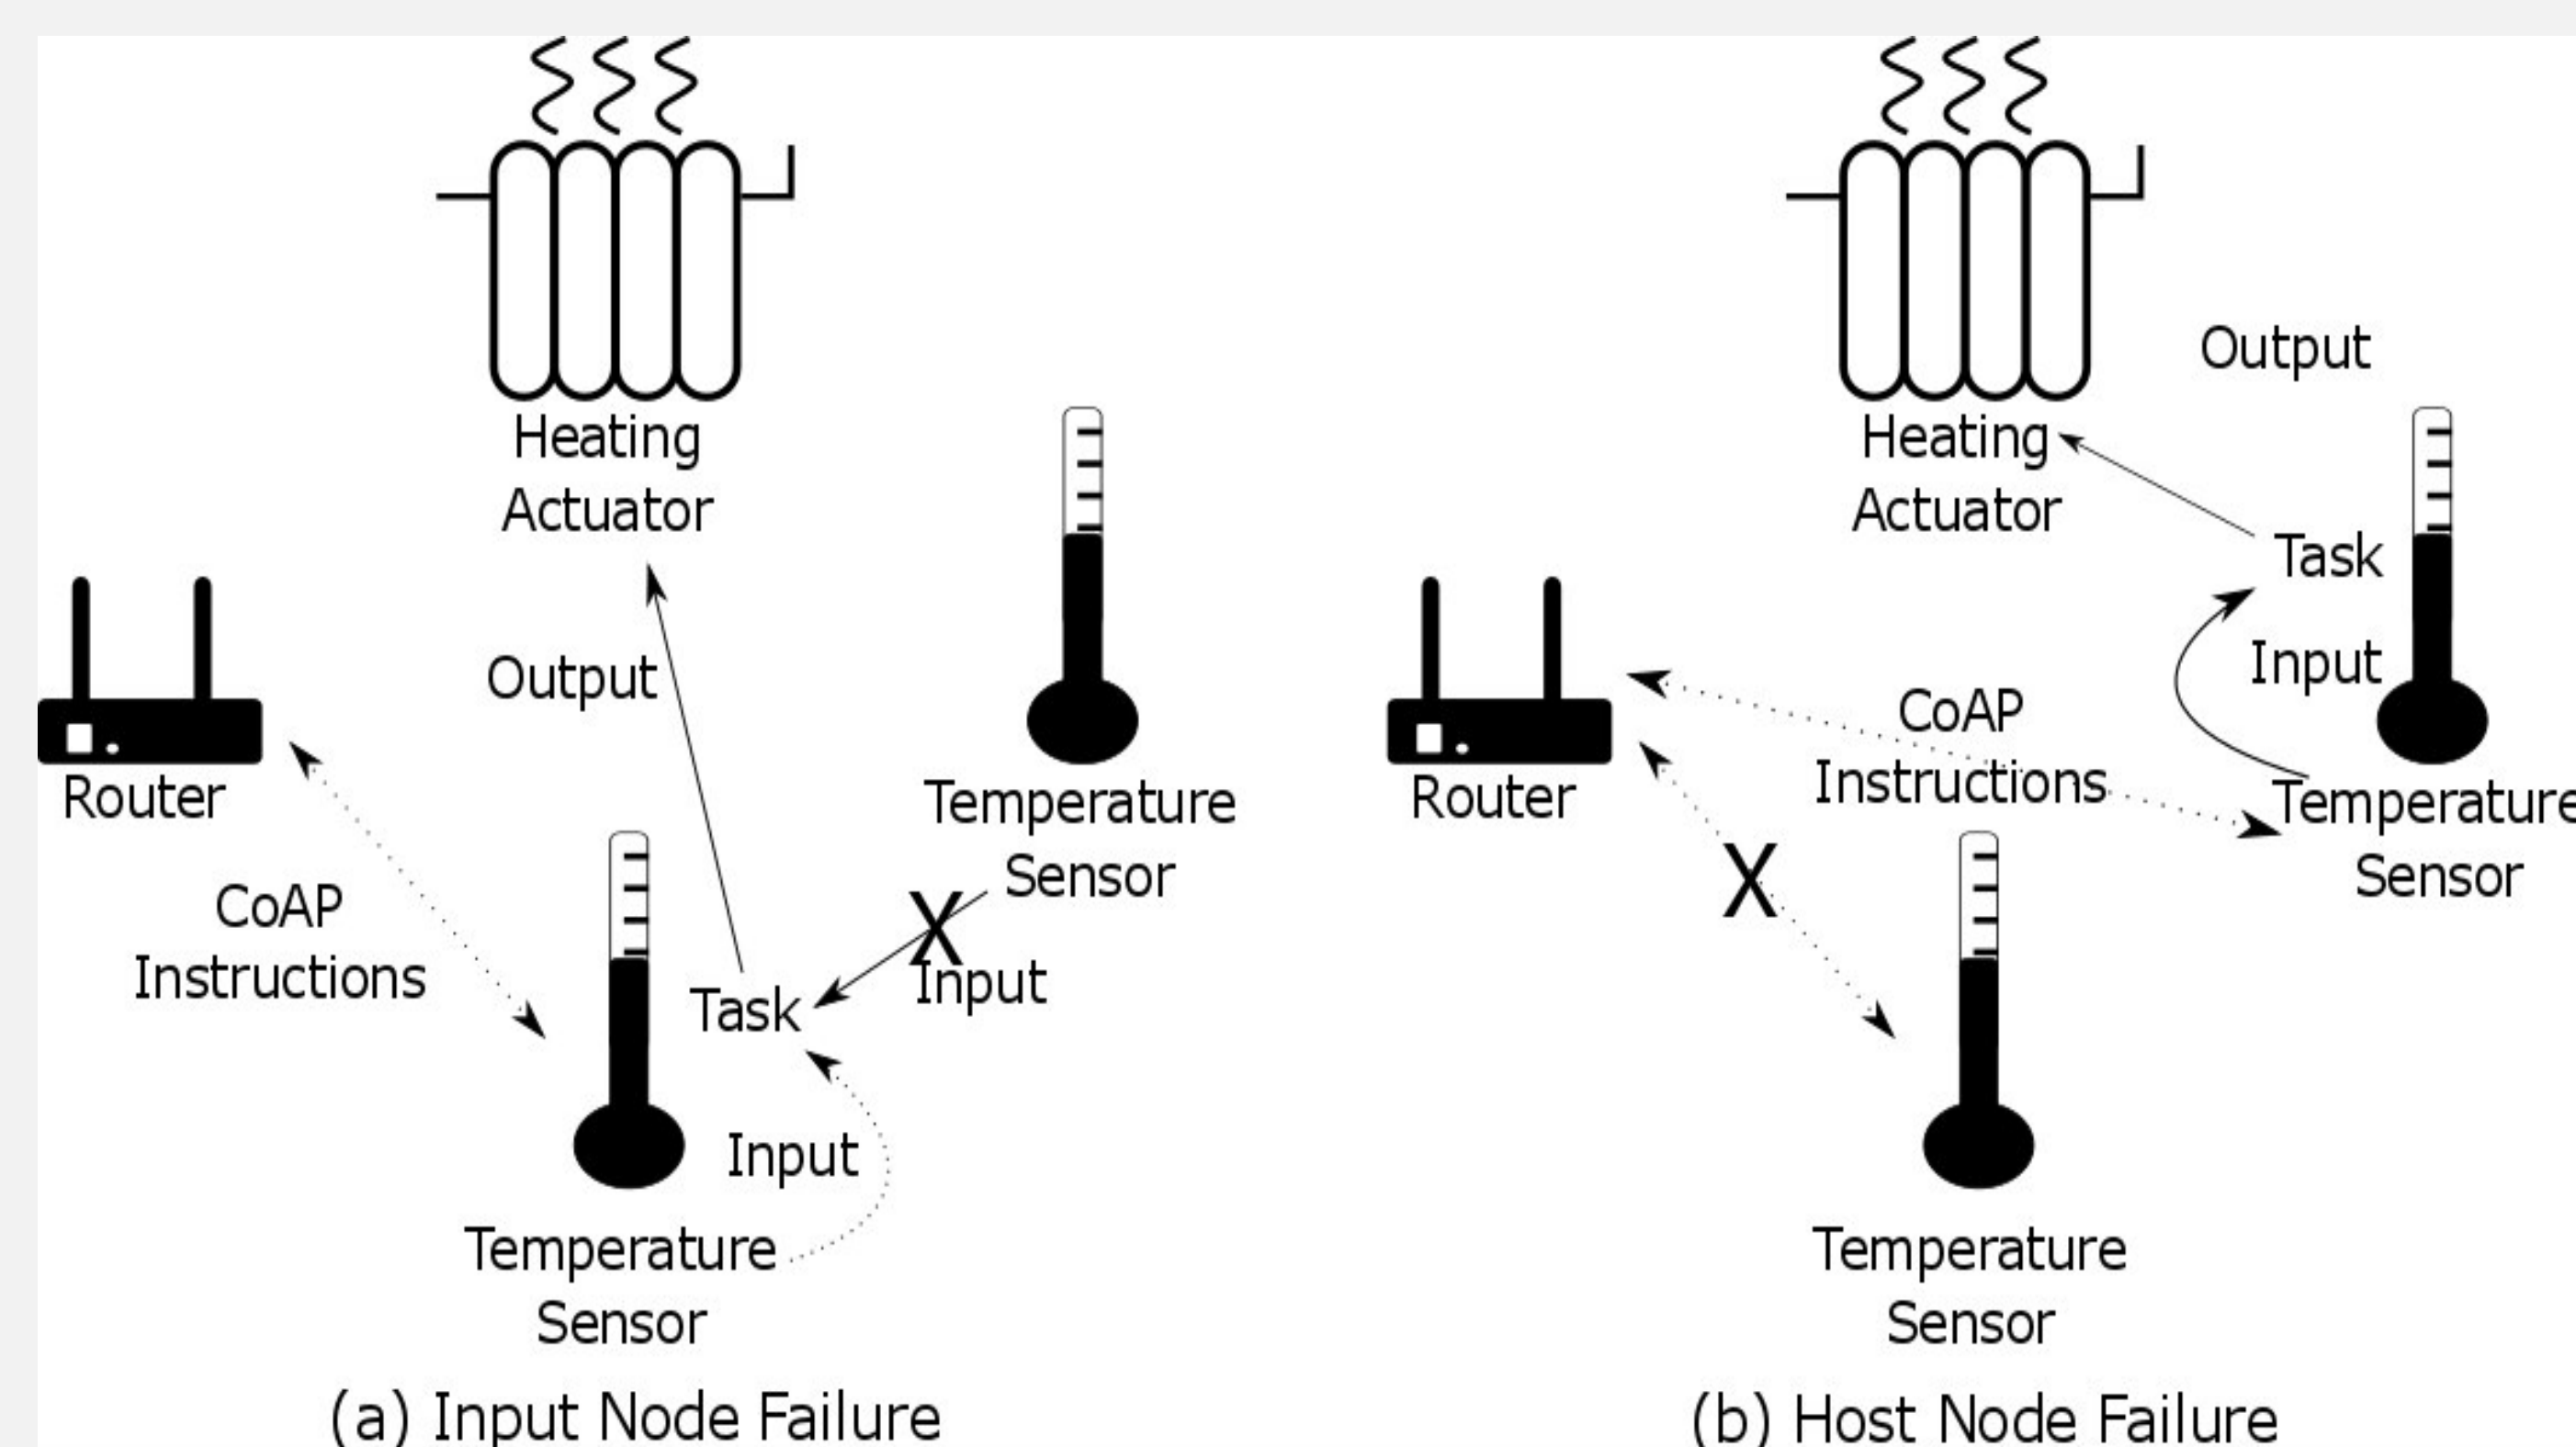

Conclusion

In this demo, we extend capabilities of T-Res to provide autonomous resource allocations for IoT applications. In addition, mT-Res provides a web-interface for user(s) to input applications independent of specific resources. This extension is an effort to support context-aware IoT[3]

References

- [1] Daniele Alessandrelli, Matteo Petracca and Paolo Pagano, «T-res: Enabling reconfigurable in-network processing in iot-based wsns», DCOSS 2013
- [2] Shashank Gaur, mt-res, https://bitbucket.org/shashankgaur/_tres_extension, 2016
- [3] Shashank Gaur, Raghuraman Rangarajan and Eduardo Tovar, «Extending T-Res with mobility for context-aware IoT», 1st International Workshop on Interoperability, Integration, and Interconnection of Internet of Things Systems 2016